


WLX Pro Nordic Access Standard black

Art.-Nr. ACNP00001

Seite 1 von 2

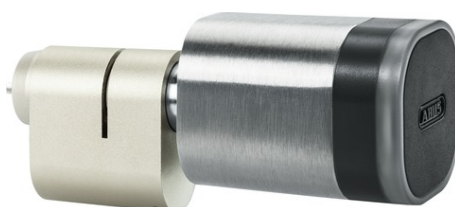

wAppLoxx Pro digital locking cylinder

The digital locking cylinder from ABUS enables convenient access to your building. It is also compatible for online use and can be operated via app. As well as the standard version, there is also the Rokoko version available

The colour of the wAppLoxx Pro cylinder can be adjusted for any door and surface with its white, grey or black covers. High protection against manipulation with extra-reinforced drilling and pulling protection as well as a read-protected wireless connection highlight the security of the wAppLoxx Pro Cylinder. The weather-resistant finish with protection class IP67 makes it particularly robust.

Technologies

- Electronic double knob cylinder with Mifare reader:
Read protected wireless connection between transponder and cylinder (Mifare Desfire EV1 in secure mode)
- Encrypted AES 128 bit data transfer between all components
- Logging of cylinder operation
- Weather-resistant as per IP 67
- The status of the cylinder battery can be checked at any time via web or app
- Activation/deactivation of connected alarm systems

Technical data - WLX Pro Nordic Access Standard black

Additional functions	Opening time can be set between 6 and 12 sec, remote access
Battery - type	Varta CR2 / CR17355 3V lithium battery
Dimensions	Knob: L = 48 mm, \varnothing = 38 mm mm
Drill protection	Standard
Electronics	Access, Intrusion
Encryption	AES 128-Bit
Environmental conditions	Min./max. temperature: -25/+65, max. air humidity: 80%
Language of instructions	DE, EN, DK, SE
Language packing	DE, EN, DK, SE
Locking media	ABUS Mifare DESfire EV1
Logging and time function	Yes
Material	Knob: stainless steel Reader: plastic

WLX Pro Nordic Access Standard black

Art.-Nr. ACNP00001

Seite 2 von 2

Technical data - WLX Pro Nordic Access Standard black

Max. number of locking media	500 authorisations, 10 fallback transponders
Number of cycles/battery	45.000
OSD language	DE, EN, DK, SE
Opening time can be set	Yes
Programming	Configuration and system administration via wAppLoxx Pro Control
Protection class IP Outdoor	67
Radio frequency	868,3 MHz
Reader type	Outdoor Mifare reader
Reading distance	< 1 cm
Signalling	Optical
Variants	oval profile
Wireless range	Indoors: 30 m, outdoors: 100 m m